



5

SCALE: 1/2" = 1'-0"





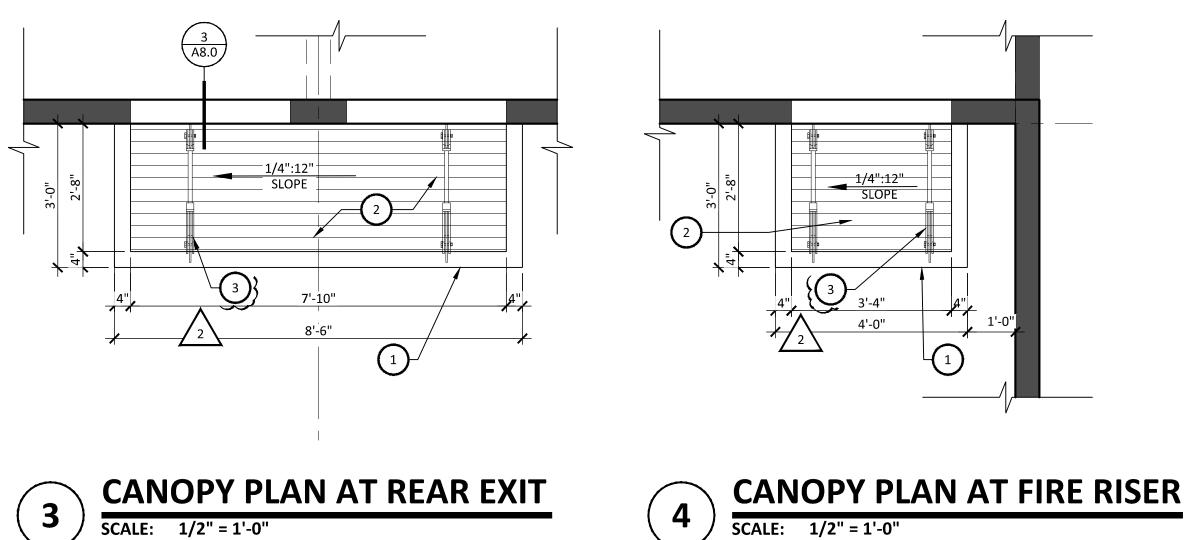

GENERAL NOTES

- A. ALL DIMENSIONS ARE FOR GENERAL ARRANGEMENT AND LOCATION ONLY - ACTUAL REQUIREMENTS AND DIMENSIONS SHOULD BE VERIFIED AND COORDINATED WITH EQUIPMENT. SHOPS DRAWING SUBMITTALS AND STRUCTURAL FRAMING B. ALL 'TOP OF' ELEVATIONS SHOWN ARE BASED FROM DATUM
- FINISH FLOOR ELEVATION 0'-0" C. ALL JOINTS IN METAL REVEALS AND EXPOSED TRIM ARE BUTT JOINT - NO LAP JOINTS - SEAL PRIOR TO PAINT FOR WEATHER
- TIGHT CONDITION D. SEE STRUCTURAL, MECHANICAL, PLUMBING AND ELECTRICAL DRAWINGS FOR ADDITIONAL EQUIPMENT/ITEMS AND ROOF PENETRATIONS NOT SHOWN ON ROOF PLAN
- ROOF DRAIN DOWN SPOUT LOCATIONS SHALL BE COORDINATED WITH THE ARCHITECTURAL FLOOR PLAN AND THE PLUMBING PLAN FOR PROPER PLACEMENT
- F. CONTRACTOR TO VERIFY/COORDINATE DUCT, CURB, ROOF PENETRATION LOCATIONS
- G. SEE STRUCTURAL FRAMING PLAN FOR ROOF MEMBER LOCATIONS
- H. ALL AREAS OF THE ROOF SURFACE SHALL MAINTAIN A MINIMUM 1/4" PER FOOT SLOPE
- ROOFING CONTRACTOR SHALL FURNISH AND INSTALL ANY/ALL ١. REGLETS J. LOCATION OF FLASHING AND COUNTER FLASHING ABOVE ROOF
- SURFACE IS TO BE INSTALLED IN COMPLIANCE WITH THE ROOFING MANUFACTURER'S REQUIREMENTS K. ALL ROOF MOUNTED EQUIPMENT SHALL BE COMPLETELY
- SCREENED FROM VIEW BY THE BUILDING PARAPET PREFABRICATED CURBS FOR ROOF TOP EQUIPMENT SHALL BE
- DESIGNED AND INSTALLED WITH TOP OR CURB LEVEL M. NO PLUMBING VENTS/EXHAUST UNITS WITHIN 10'-0" OF INTAKE OR 5'-0" OF EXTERIOR WALL
- N. ALL ROOF PENETRATIONS, INCLUDING PLUMBING AND ELECTRICAL ROOF JACKS SHALL BE 18" MINIMUM APART AND MADE PRIOR TO MEMBRANE ROOF INSTALLATION -
- SEE DETAILS 2 AND 3/A1.2 FOR MORE INFORMATION
- O. OVERFLOW SCUPPER RIMS SHALL BE 2" ABOVE PRIMARY ROOF DRAIN RIMS - COORDINATE AND VERIFY INSTALLATION PROVIDE CRICKET ON HIGH SIDE OF ALL MECHANICAL Ρ.
- EQUIPMENT AND ROOF CURBS


KEYNOTES (#)


. STEEL TUBING CANOPY FRAME


- Q. EXTEND ROOFING COATING ON BACK SIDE OF PARAPET TO TERMINATE OR OVER WOOD PARAPET - SHOULD NOT BE SEEN ON EXTERIOR FACE OF BUILDING
- R. CONTRACTOR SHALL PAINT FRONT, TOP, BACK SIDES OF ALL WALL COPINGS


CORRUGATED STEEL DECKING - SEE STRUCTURAL DWGS

TIE ROD, REFER TO A4.0 FOR FINISH & 7/A8.0 FOR DETAIL

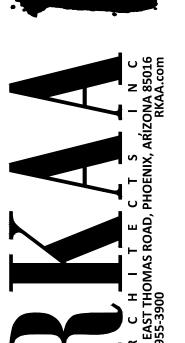



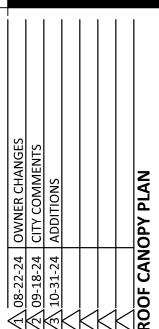

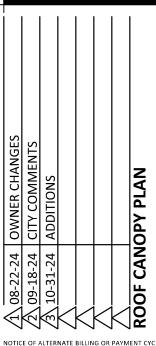



design by: **RH** drawn by: RL checked by: **RH**



CANOPY PLAN AT LOADING DOCK

6

SCALE: 1/2" = 1'-0"